


# ブラシレスDCモーター

## RB-8530-C8

### 主な用途：

高流量酸素濃縮器、医療機器、サービスロボット

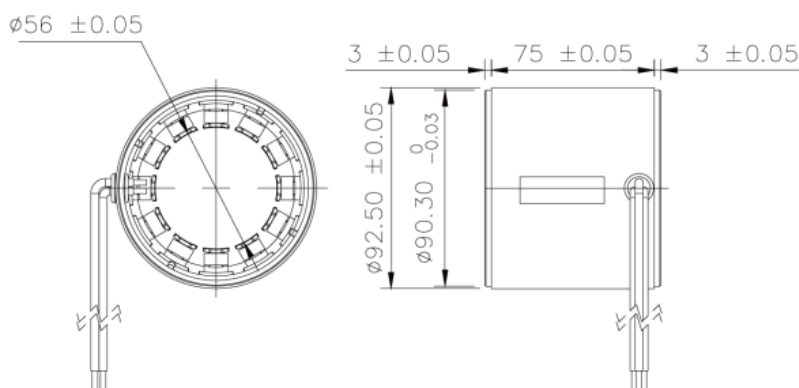

| MODEL           | VOLTAGE         |                | NO LOAD      |              | AT MAXIMUM EFFICIENCY |              |                |                |             |          | STALL          |                |
|-----------------|-----------------|----------------|--------------|--------------|-----------------------|--------------|----------------|----------------|-------------|----------|----------------|----------------|
|                 | OPERATING RANGE | NOMINAL        | SPEED<br>rpm | CURRENT<br>A | SPEED<br>rpm          | CURRENT<br>A | TORQUE<br>g.cm | TORQUE<br>mN-m | OUTPUT<br>W | EFF<br>% | TORQUE<br>g.cm | TORQUE<br>mN-m |
| RB-8530-C8-N-01 | 12.0-26.0V      | 12.0V CONSTANT | 2300         | 2.8          | 1850                  | 21           | 10200          | 1000           | 205         | 79       | 89800          | 8810           |
| RB-8530-C8-N-02 | 12.0-26.0V      | 24.0V CONSTANT | 2400         | 1.5          | 1900                  | 11           | 10200          | 1000           | 210         | 80       | 115770         | 11350          |
| RB-8530-C8-N-03 | 24.0V-40.0V     | 36.0V CONSTANT | 2300         | 1            | 1850                  | 7            | 10200          | 1000           | 210         | 80       | 115770         | 11350          |
| RB-8530-C8-N-04 | 6.0V-26.0V      | 18.0V CONSTANT | 2300         | 3.1          | 1850                  | 14           | 10200          | 1000           | 205         | 76.84    | 89800          | 8810           |

シャフト長、性能パラメータ、EMC対策は用途に応じて調整可能です。詳細は営業担当までお問い合わせください。

